

Setup Guide - Standard Range iMistAway/Gen 3


Install Node on Gen 3

- Thread antenna cable onto coax connection on node.
- Secure node to underside of lid with nuts as shown.
- Push male connector on antenna cable through hole in lid.
- Slip o-ring over connector. Add washer, then nut and tighten to press o-ring flush against lid as shown.
- Thread antenna (marked with purple rings) onto connector on top of lid.



Plug Node into Controller and Set PAN ID

- Unplug misting unit** and lift controller from well without disconnecting cables.
- Thread gray node cable through slot in shroud and up through well to controller.
- Connect white connector on cable to six pin port on controller as shown.
- Restore power to unit and observe boot-up. **Confirm you see NET ON.**
- In DATA menu, select PAN 1. Press and hold Green button until "1" flashes.
- Find PAN ID on box or gateway label.
- Enter PAN ID**, then Green button to select. Controller responds with **WAIT**, then **DONE**.

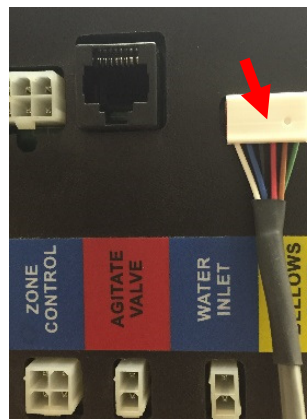

Connect Gateway to Internet


- Locate the modem or router that provides an internet connection to customer's property.
- Connect gateway to power with adapter. Any green light indicates power.
- Connect gateway to customer's router or modem with blue ethernet cable. Wait 60 seconds.
- Corner light will begin flashing amber, then alternating green/amber when it senses the internet, then solid green when connected. Flashing amber light indicates no internet connection.




Turn page for Activation Guide

iMistAway Activation Guide


Add Customer from iMistAway App

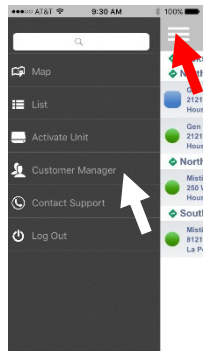

Select Customer Manager




Input Customer Info




Select Access Level

- Full – website and dealer app
- Mobile - customer app only




Save Customer


Activate Unit

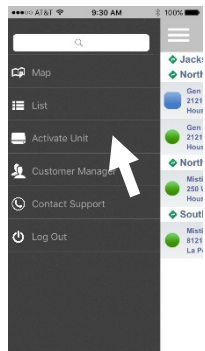


Select Activate Unit

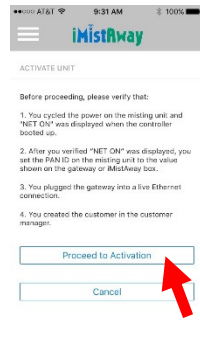


Confirm prep steps

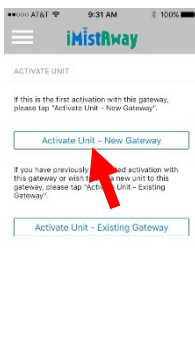

Begin activation

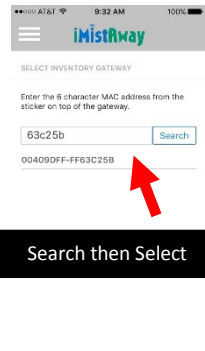


Search then Select




Associate to Customer

Search then Select




If gateway is online, iMist searches for node



iMist finds node

Stop Countdown and Continue




Name system and Finish

Name Unit


Check Connection Sync Controller Send Invitation




Select Unit from List Screen then swipe

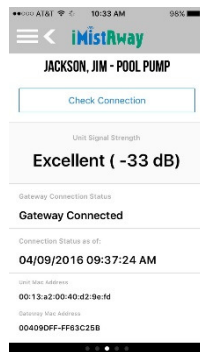

Check Connection (< 1 min)



Start Data Synchron (few minutes)



Send login invitation from Customer Manager